



**POLYKEN® 510**  
**Premium Vinyl-coated Cloth**  
**Gaffers Tape**


**APPLICATIONS**

- Used to protect and anchor wiring in the photography and film industry.
- Bookbinding.
- Vinyl seat repair.
- Wrapping or bundling wire, metals, and plastics.
- Moisture and dust-proof sealing of equipment cases and film canisters.
- Designed to withstand exterior weather and temperature applications.

**FEATURES & BENEFITS**

- Heavy-duty vinyl-coated waterproof cloth with excellent conformability.
- High tack tape with excellent adhesion for superior performance.
- Non-reflective, low-gloss backing.
- Excellent performance over a wide temperature range.
- Clean removal adhesive.
- High thread count for a clean, straight tear.

**CONSTRUCTION**

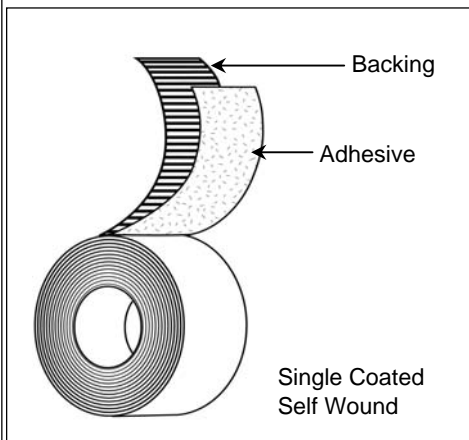

**PRODUCT DESCRIPTION**

**Single-Coated Construction**

**Backing:**

- Vinyl-coated Cloth

**Adhesive:**

- Rubber

**Colors:**

- Black, Blue, Brown, Gray, Green, Olive Drab, Red, Yellow, White, Neon Green, Neon Orange, Neon Pink, Neon Yellow

**TEST DATA**

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	11.5 mils	0.290 mm	ASTM D 1000
Adhesion to Steel	50 oz./in.	56.0 g/mm	PSTC-1
Adhesion to Backing	29 oz./in.	32.48 g/mm	PSTC-1
Tensile Strength	42 lb./in.	0.75 kg/mm	ASTM D 1000
Tack (Rolling Ball)	4"		
Maximum Performance Temperature	200 F		

\*\*Recommended storage conditions: 40-60% Humidity, 60°F-80°F

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.